

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/050368 A1

(51) International Patent Classification⁷: **B41F 35/00**

(21) International Application Number:
PCT/SE2003/001840

(22) International Filing Date:
28 November 2003 (28.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0203576-4 3 December 2002 (03.12.2002) SE

(71) Applicant (for all designated States except US): **BALDWIN JIMEK AB** [SE/SE]; P.O. Box 14, SE-232 21 Ärlöv (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BIRGER, Hansson** [SE/SE]; Nils Pers väg 5, S-232 51 Åkarp (SE).

(74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box 4188, S-203 13 Malmö (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A BOBBIN FOR A WASHING UNIT IN A PRINTING PRESS

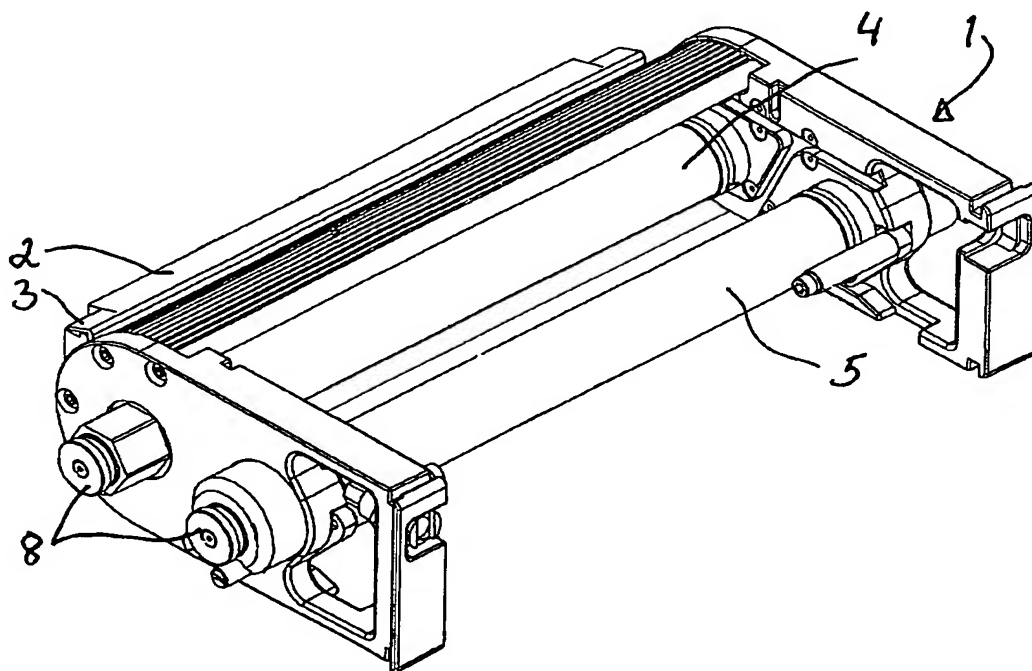

(57) Abstract: A bobbin (6) for a cleaning cloth (2) in a washing unit (1) for a cylinder in a printing press is provided with internal, longitudinal or axial projections (6') for cooperation with corresponding longitudinal grooves (7') in a shaft (7) therefore and with embossments over at least a part of its circumferential surface.